Technical Data Sheet

Product: Primary Pro - Rubber Lined Clips

Product Codes: AS008 - For 22mm & 28mm Insulation | AS018 - For 35mm & 42mm Insulation

Date Issued: November 2025 **Version:** Rev 2

Product Description

Primary Pro Rubber Lined Clips are designed to securely support insulated pipework while maintaining energy efficiency and reducing noise transmission. The rubber lining prevents vibration and metal-to-metal contact, providing secure support and a professional finish for external insulation systems.

Applications

For securing externally insulated pipework in heating and renewable energy systems.
Suitable for use with Primary Pro Insulation on air source heat pumps, heating, and plumbing installations.

Features & Benefits

- Rubber lining grips within the steel bracket to prevent movement or sliding
- Anti-loss washers prevent screws from falling during installation
- Sound-insulating lining compliant with DIN 4109
- Compatible with all Primary Pro Insulation sizes

Technical Data

Property	AS008	AS018
Application	For 22mm & 28mm Insulation	For 35mm & 42mm Insulation
Material	Steel, zinc plated	Steel, zinc plated
Lining	Rubber (sound insulating)	Rubber (sound insulating)
Connection Thread	M8 / M10	M8 / M10
Screw Size	M6	M6
Temperature Resistance	–30°C to +120°C	–30°C to +120°C
Noise Reduction	Up to 22 dB(A)	Up to 22 dB(A)
Approvals	CE, ETA, RAL-GZ 655/B, ITB (KOT), EPD	CE, ETA, RAL-GZ 655/B, ITB (KOT), EPD

Note: Routine inspection and maintenance of exposed support and fixing components is recommended as part of ongoing system maintenance, particularly in exposed environments

---

Dimensions & Measurements

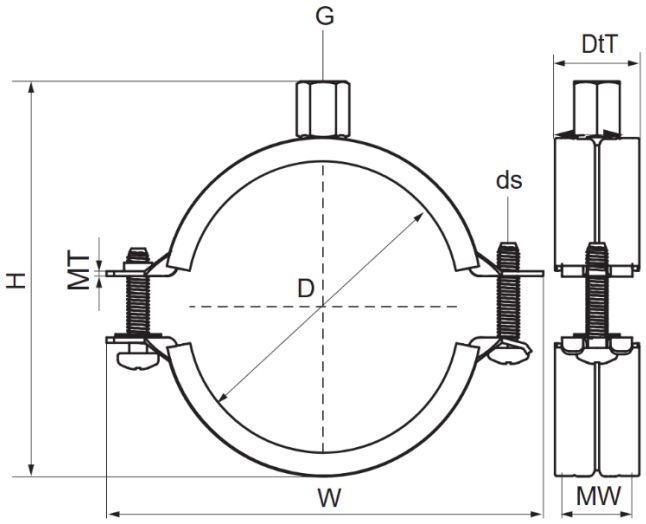

Dimension	AS008	AS018
Outside Pipe Diameter (D)	68–74 mm	75–81 mm
Connection Thread (G)	M8/M10	M8/M10
Total Height (H)	103 mm	109 mm
Total Width (W)	118 mm	124 mm
Total Depth (DtT)	23 mm	23 mm
Material Thickness (MT)	1.50 mm	1.50 mm
Material Width (MW)	20 mm	20 mm
Screw Size (ds)	M6	M6
Maximum Allowed Load (Faz)	850 N	850 N

Note: All dimensions are in millimetres (mm) unless otherwise stated. Maximum allowed load is expressed in Newtons (N).

Installation

- Position clips externally over insulated pipework to avoid compression of insulation.
- Ensure the rubber lining remains in place before tightening.
- Tighten using appropriate torque to secure without over-compression.
- Suitable for both wall-mounted and hanging applications.

Storage & Handling

Store in a dry, cool environment away from moisture and contaminants.
Inspect clips before use to ensure rubber lining and metal surfaces are intact.

Health & Safety

Non-hazardous under normal conditions of use.
Wear gloves and eye protection during installation.

Contact

SMARTOVATIONS LTD - Unit 1AB Spectrum Business Park, McGregors Way, Chesterfield, Derbyshire, S40 2WB
Telephone: 01433 440290
Email Address: info@primarypro.co.uk
Website: www.primarypro.co.uk

Legal Disclaimer: The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. This company shall not be held liable for any damage resulting from handling or from contact with the above product.